

御 仕 様 書

ES-500

PROTECH®

Specifications

Camera Adaptor ES-500

ES-500 仕様

Output		出力
Return	RET OUT :1	BNC x1: 1Vp-p, 75Ω, Analog composite or HD-Y ※1
Video AUX*	VIDEO OUT :1	BNC x1: 1Vp-p, 75Ω, Analog composite
Monitor I/F	MONITOR OUT :1	Mini 6-pin(female) x1: DC 16V 1A , TALLY signal
Tally	TALLY OUT :1	BNC x1
Time Code	TC OUT :1	BNC x1
DC	V-mount :1	DC 16V (maximum 4.5A)
Input		入力
HD component	Y/Pb/Pr IN :1	BNC x3: 1Vp-p, 75Ω, Analog component, auto detecting (HD/SD)
Composite	VIDEO IN :1	BNC x1: 1Vp-p, 75Ω, Analog composite
Audio	AUDIO IN :1	XLR 3-pin(female) x1 INPUT LEVEL= +4dB/-20dB/-60dB, P-MIC 48V on/o?
Time Code AUX*	TC IN :1	BNC x1: INPUT
Intercom		インカム
Intercom headset	HEADSET :1	XLR 4-pin(male) x1
Tally		タリー
Tally indicator	Tally indicator : 1	Main panel x1
Remote		リモート
Remote	REMOTE :1	8-pin(female) ※2
LANC	LANC :1	Stereo mini-jack φ 2.5mm
Main connection		接続
Socket	26-pin(male)	
Maximum distance	100m(0.0625mile)	
General		一般
Power requirement	DC 16V 10W Max.	
Power consumption	approx. 10W Max.	
Storage temperature	-20°C to 60°C (-4 to 140°F)	
Operating temperature	0°C to 40°C (+32 to 104°F)	
Operating humidity	10% to 90% (no condensation)	
Dimensions (WxHxD)	122 x 169 x 70 mm (4.80 x 6.65 x 2.76 inches) (excluding protrusions)	
Weight	approx. 1.0kg (approx. 2.20 lbs.) (without options)	

AUX* : The VIDEO OUT or TC IN of AUX is selectable.


※1 : LVM-89W can receive an analog composite only.

※2 : 8-pin for SONY remote control unit RM-B750 or RM-B150

Outside View and Dimensions

Camera Adaptor ES-500

ES-500 外形寸法図

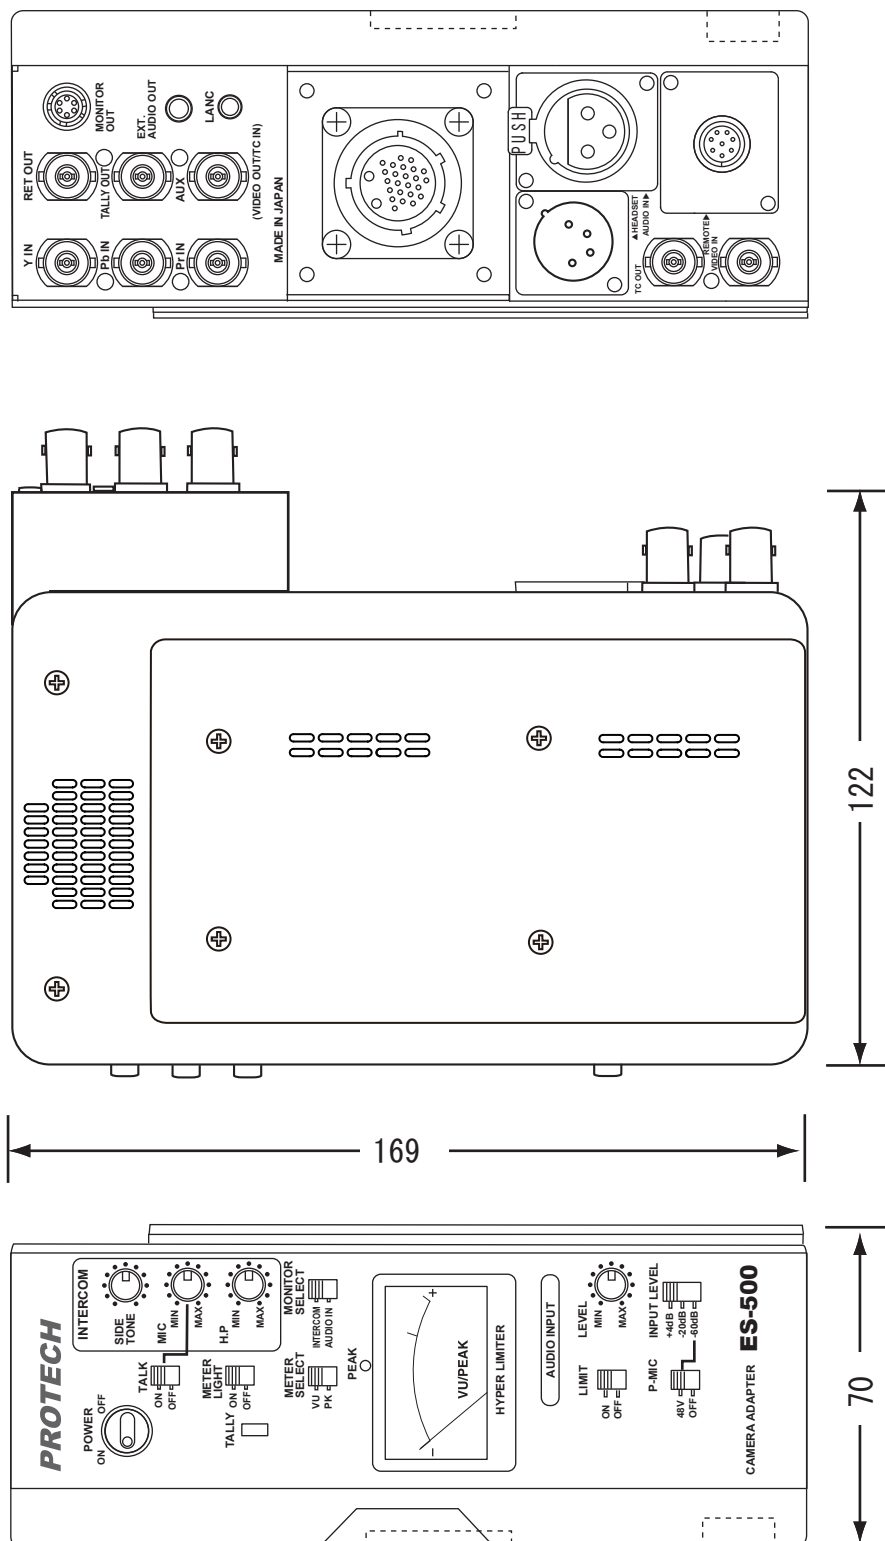

Outside dimension (unit: mm)
外形寸法図(単位:ミリ)